



ISO 9001 & PED Certified

Canadian Registered in all provinces

- L

ΙΖΕ	L		SIZE	L	
/8	0.273 0.395 0.407		2	0.697	
/4			2-1/2	0.933	
/8			3	1.016	
/2	0.534	0.534		1.071	
/4	0.553		4	1.094	
1	0.661		5	1.187	
1/4	0.681		6	1.208	
1/2	0.681		8	1.313	
	/8 /4 /8 /2 /4 1 1/4	/8 0.273 /4 0.395 /8 0.407 /2 0.534 /4 0.553 1 0.661 1/4 0.681	/8 0.273 /4 0.395 /8 0.407 /2 0.534 /4 0.553 1 0.661 1/4 0.681	/8 0.273 /4 0.395 /8 0.407 /2 0.534 /4 0.553 1 0.661 1/4 0.681 2 2-1/2 3 3-1/2 4 5 5 6	

Length of thread screwed into fitting

## Threaded Union 90° €lbow

Material: Available in a complete range of Carbon Steels, Stainless Steels, Alloy Steels and Non-ferrous metals certified to ASTM, ASME, and Military standards.

Sizes: 1/8"-3" in CL 3000

Also available in CL 2000, CL 6000, CL 9000 and CL 10,000

and in reducing pipe sizes.


Threads: American National Standard Taper Pipe Threads

NPT (ANSI/ASME B1.20.1-1983)

Also available in other thread forms: NPTF, NPSC, NPSM, NGT,

SAE, BSPT, BSPP and in any combination.

Left hand threads available upon request.

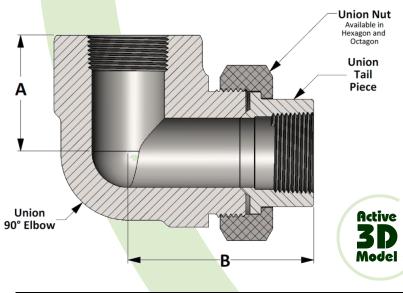



All dimensions are in inches • Weights are based on Carbon Steel

PIPE SIZE	Class 3000 - Figure No. 03059										
	1/8	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3
Α	1.125	1.125	1.125	1.313	1.500	1.750	2.375	2.375	3.000	3.750	4.188
В	1.938	1.938	2.031	2.281	2.563	2.969	3.813	3.813	4.750	5.866	6.406
LBS	0.96	0.94	0.98	1.30	1.90	3.00	3.88	6.63	8.13	22.50	27.20